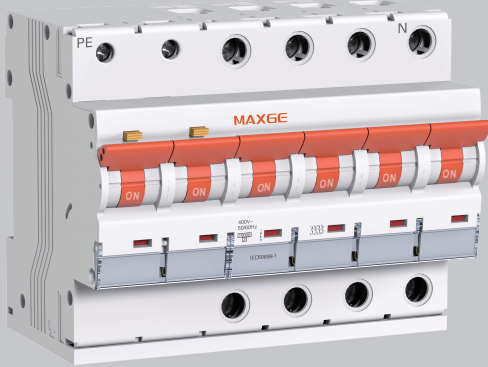
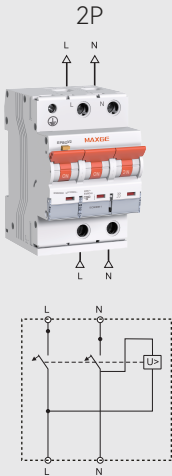
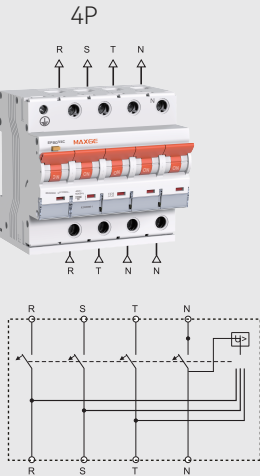
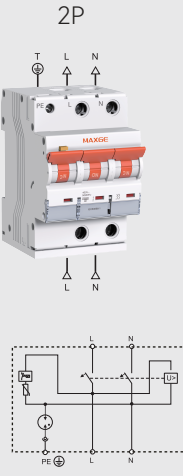
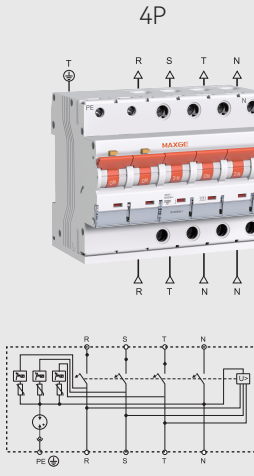



EPBA Series

Circuit Breaker Accessories


Technical data						
Code NO.	 UVT			 UVT+SPD		
Current	1-63A					
Dimension	Poles:	2P	4P	Poles:	2P	4P
	Size:	58mm	90mm	Size:	58mm	108mm
Capacity	4.5kA,6kA,10kA					
Standard values of break time and non-actuating time at a voltage(Ua)						
	250 V	275 V	300 V	350 V	400 V	
Maximum break time	No tripping	15 s	3 s	0.75 s	0.2s	
Minimum non-actuating time		3 s	1 s	0.25 s	0.1s	
Wire diagram						
 UVT		 UVT		 UVT+SPD		 UVT+SPD

Benefits


- 1.Brand
- 2.Type
3. Rated current
4. Tripping type
5. Rated voltage
6. Breaking capacity
7. Energy Limiting
- 8.Approval
- 9.Electrical wiring diagram
- 10.ON/OFF indication

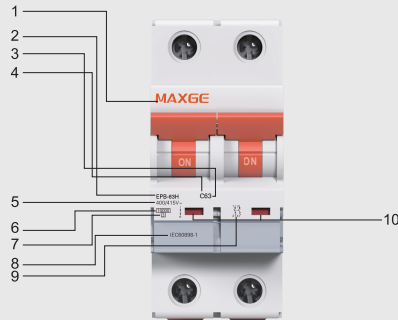

- Attractive device design
- Easily recognized, color-coded switching position
- Indication integrated in the handle.




- Well matched with RCCB EPR-2




- Well matched with Isolator EPI-R



- Auxiliary contacts can be added on the left side of the MCB

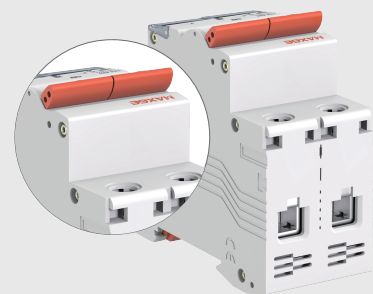

- Ergonomic handle for user-friendly switching

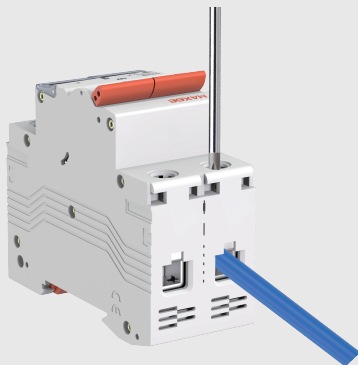

- Safety terminal:
 - easy wiring
 - protection degree IP20.
- Pozidriv and slot screw head. Torque up to 2.5 N.m.



- MCB and RCCB can be connected with PIN type busbar both at the top and bottom terminals.with easy DIN-rail extraction.



- MCB and RCCB can be connected with FORK type busbar both at the top and bottom terminals.with easy DIN-rail extraction.