

SGLW30 Series

Rotary Switches

Auxiliary contacts and optional accessories




F1 F2 F3 F8



F4 F5 F6 F7

Grounding or auxiliary contacts

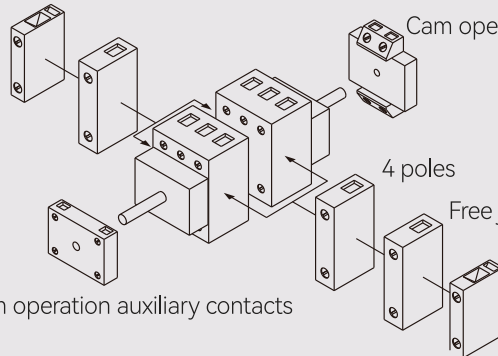

Auxiliary contact	Specification	Function	Auxiliary contact	Specification	Function
F1	20A/25A/32A	Grounding Terminal	F5	40A/63A	NO+NC
F2	40A/63A		F6	80A/100A	
F3	80A/100A		F7	20A/25A/32A	
F4	25A/32A	NO+NC	F8	125A/175A	Grounding Terminal

Model	SGLW30-20		SGLW30-25		SGLW30-32		SGLW30-40		SGLW30-63	
Rated thermal current A	20		25		32		40		63	
Rated voltage V	240	440	240	440	240	440	240	440	240	440

Rated value		Ie/Pe									
AC-21A	A/kW	20/-	20/-	20/-	20/-	32/-	32/-	40/-	40/-	63/-	63/-
AC-22A	A/kW	20/-	20/-	20/-	20/-	32/-	32/-	40/-	40/-	63/-	63/-
AC-23A	A/kW	11/3	11/5.5	15/4	15/7.5	22/5.5	22/11	30/7.5	30/15	43/11	43/22
AC-3	A/kW	7.5/2.2	7.5/3.7	11.7/3	11.7/5.5	15/4	15/7.5	22/7.5	22/11	36/11	36/18.5

Model	SGLW30-80		SGLW30-100		SGLW30-125		SGLW30-175	
Rated thermal current A	80		100		125		175	
Rated voltage V	240	440	240	440	240	440	240	440

Rated value		Ie/Pe									
AC-21A	A/kW	80/-	80/-	100/-	100/-	125/-	125/-	175/-	175/-		
AC-22A	A/kW	80/-	80/-	100/-	100/-	125/-	125/-	175/-	175/-		
AC-23A	A/kW	57/18.5	57/30	70/22	70/37	90/30	90/45	110/30	110/55		
AC-3	A/kW	43/15	43/22	57/18.5	57/30	70/22	70/37	90/30	90/45		